

SPECIAL NOTICE

**ASME B56.11.1-1992
DOUBLE RACE OR BI-LEVEL SWIVEL AND RIGID INDUSTRIAL CASTERS**

There will be no addenda or interpretations for 1993 published to ASME B56.11.1-1992. Within the past year neither changes to, nor inquiries regarding, the technical requirements of this document have been issued.



K5192A

OCTOBER 1993


THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS
345 East 47th Street, New York, N.Y. 10017

K5192A

ASME B56.11.1-1992

(REVISION OF ASME/ANSI B56.11.1-1988)

POWERED AND NONPOWERED INDUSTRIAL TRUCKS

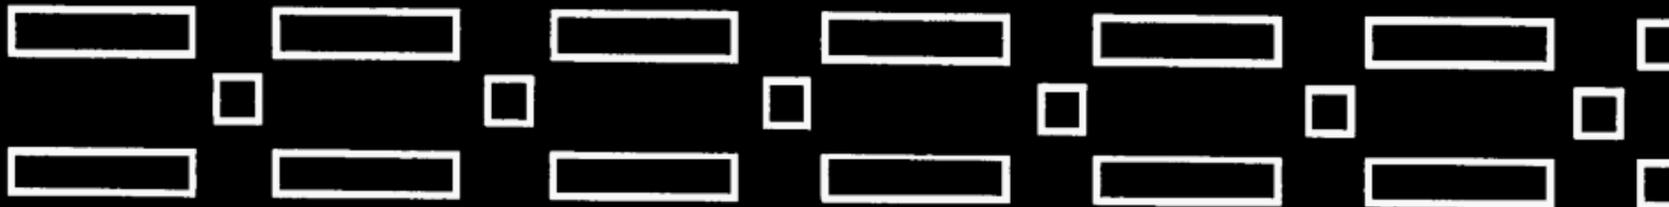


REAFFIRMED 2000

FOR CURRENT COMMITTEE PERSONNEL
PLEASE SEE ASME MANUAL AS-11

Double Race or Bi-Level Swivel and Rigid Industrial Casters

AN AMERICAN NATIONAL STANDARD

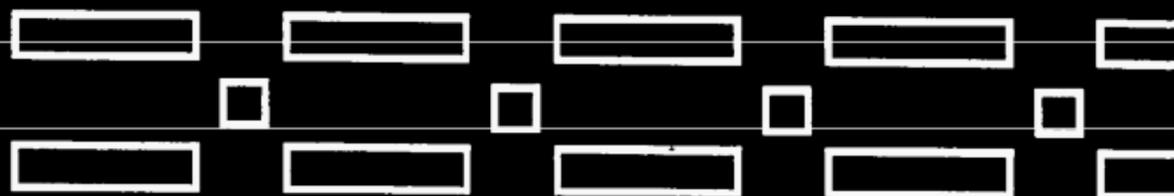

The American Society of
Mechanical Engineers



AN AMERICAN NATIONAL STANDARD

POWERED AND NONPOWERED INDUSTRIAL TRUCKS

Double Race or Bi-Level Swivel and Rigid Industrial Casters

ASME B56.11.1-1992
(REVISION OF ASME/ANSI B56.11.1-1988)



The American Society of
Mechanical Engineers

345 East 47th Street, New York, N.Y. 10017

Date of Issuance: February 29, 1992

The 1992 edition of this Standard is being issued with an automatic addenda subscription service. The use of an addenda allows revisions made in response to public review comments or committee actions to be published on a regular yearly basis; revisions published in addenda will become effective 1 year after the Date of Issuance of the addenda. The next edition of this Standard is scheduled for publication in 1995.

ASME issues written replies to inquiries concerning interpretations of technical aspects of this Standard. The interpretations will be included with the above addenda service. Interpretations are not part of the addenda to the Standard.

ASME is the registered trademark of The American Society of Mechanical Engineers.

This code or standard was developed under procedures accredited as meeting the criteria for American National Standards. The Consensus Committee that approved the code or standard was balanced to assure that individuals from competent and concerned interests have had an opportunity to participate. The proposed code or standard was made available for public review and comment which provides an opportunity for additional public input from industry, academia, regulatory agencies, and the public-at-large.

ASME does not "approve," "rate," or "endorse" any item, construction, proprietary device, or activity.

ASME does not take any position with respect to the validity of any patent rights asserted in connection with any items mentioned in this document, and does not undertake to insure anyone utilizing a standard against liability for infringement of any applicable Letters Patent, nor assume any such liability. Users of a code or standard are expressly advised that determination of the validity of any such patent rights, and the risk of infringement of such rights, is entirely their own responsibility.

Participation by federal agency representative(s) or person(s) affiliated with industry is not to be interpreted as government or industry endorsement of this code or standard.

ASME accepts responsibility for only those interpretations issued in accordance with governing ASME procedures and policies which preclude the issuance of interpretations by individual volunteers.

No part of this document may be reproduced in any form,
in an electronic retrieval system or otherwise,
without the prior written permission of the publisher.

Copyright © 1992 by
THE AMERICAN SOCIETY OF MECHANICAL ENGINEERS
All Rights Reserved
Printed in U.S.A.

FOREWORD

(92)

(This Foreword is not part of ASME B56.11.1-1992.)

The first edition of B56.11.1, a revision and redesignation of MH11.1-1973(R1978), was approved by the ASME B56 Committee on Powered and Nonpowered Industrial Trucks and by the sponsor organization, and was approved and designated as an American National Standard by the American National Standards Institute, Inc. on April 19, 1985.

ASME/ANSI B56.11.1-1988 was approved by the B56 Committee, by the sponsor, and after public review, by the American National Standards Institute, Inc. on November 17, 1988.

ASME B56.11.1-1992 was approved by the B56 Committee, by ASME, and after public review, by the American National Standards Institute, Inc. on January 13, 1992.

Safety codes and standards are intended to enhance public health and safety. Revisions result from committee consideration of factors such as technological advances, new data, and changing environmental and industry needs. Revisions do not imply that previous editions were inadequate.

**ASME STANDARDS COMMITTEE B56
Powered and Nonpowered Industrial Trucks**

(The following is the roster of the Committee at the time of approval of this Standard.)

OFFICERS

J. D. Schell, *Chairman*
R. G. Lang, *Vice Chairman*
W. Berger, *Secretary*

COMMITTEE PERSONNEL*

ALLIANCE OF AMERICAN INSURERS

R. A. Klebes, Liberty Mutual Insurance Co.

AMERICAN TRUCKING ASSOCIATIONS, INC.

N. Darmstadter, American Trucking Associations, Inc.

J. M. Dandrea, *Alternate*, American Trucking Associations, Inc.

INDUSTRIAL TRUCK ASSOCIATION, THE

W. J. Montwieler, The Industrial Truck Association

INTERNATIONAL ASSOCIATION OF MACHINISTS AND AEROSPACE WORKERS

J. W. Barnett, International Association of Machinists and Aerospace Workers

E. W. Sprang, *Alternate*, International Association of Machinists and Aerospace Workers

MOTOR VEHICLE MANUFACTURERS ASSOCIATION

E. E. Meyer, Ford Motor Co.

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION

W. N. Ritchie, East Penn Manufacturing Co., Inc.

J. L. Browning, *Alternate*, National Electrical Manufacturers Association

UNDERWRITERS LABORATORIES, INC.

E. W. Killoren, Underwriters Laboratories, Inc.

U.S. DEPARTMENT OF THE ARMY

N. Fertman, Belvoir RD&E Center

INDIVIDUAL MEMBERS

L. J. Churches, Churches & Associates, Inc.

R. C. Fuller

G. L. Gaulke, Hyster Co.

L. Gould, Modern Materials Handling Magazine

E. B. Gutta

T. W. Hill, Clark Material Systems Technology Co.

* The members listed, except for those listed under the heading for individual members, were nominated by their respective organizations.

D. E. Hupp, Aluminum Company of America
 R. R. Kareckas, Kellogg Co.
 D. T. LaBelle, ITL Industrial Tires, Inc.
 R. G. Lang, Eastman Kodak Co.
 A. C. Karelus, *Alternate*, Eastman Kodak Co.
 R. R. Lasecki
 E. J. Ramsey, Sellick Equipment Ltd.
 G. H. Ritterbusch, Caterpillar Tractor Co.
 R. N. Rogers, The Raymond Corp.
 J. D. Schell
 E. R. Sirotak
 F. Steinberger, Hydra-Matic, Division of General Motors

HONORARY MEMBER

O. S. Carliss

**SUBCOMMITTEE B56.11 — STANDARDIZATION OF POWERED AND
 NONPOWERED INDUSTRIAL TRUCKS**

S. Simpson, *Chairman*, SMC
 G. L. Gaulke, *Vice Chairman*, Hyster Co.
 W. Berger, *Secretary*, ASME
 F. L. Clason, Caterpillar Industrial, Inc.
 N. Fertman, Belvoir RD&E Center
 R. R. Kareckas, Kellogg Co.
 E. W. Killoren, Underwriters Laboratories, Inc.
 R. D. Lachman, Gehl Power Products
 D. J. Healy, *Alternate*, Gehl Power Products
 R. G. Lang, Eastman Kodak Co.
 L. Laya, R. R. Donnelly & Sons Co.
 W. J. Montwieler, The Industrial Truck Association
 E. J. Ramsey, Sellick Equipment Ltd.
 T. P. Rhoades, J. M. Miller Engineering, Inc.
 J. D. Schell

ASME B56.11.1-1992 SUMMARY OF CHANGES

The 1992 edition of B56.11.1 includes the following changes, identified by (92).

<i>Page</i>	<i>Location</i>	<i>Change</i>
iii	Foreword	Revised
1	General	(1) Third paragraph revised (2) Footnote revised

CONTENTS

Foreword	iii
Standards Committee Roster	v
Summary of Changes	vii
General	1
1 Scope	3
2 Explanation	3
3 Interpretation	3
4 Duty Classifications	3
5 Dimensions and Tolerances	5
Figure	
1 Caster Terms	5
Table	
1 Dimensions for Industrial Casters	4
Appendix	
A Metric (SI) Units Conversion Table	7

POWERED AND NONPOWERED INDUSTRIAL TRUCKS

(92) GENERAL

This Standard is one of a series that has been formulated with the American Society of Mechanical Engineers as Sponsor in accordance with the Accredited Organization method, the procedures accredited by the American National Standards Institute, Inc., and the following scope.

Establishment of the safety requirements relating to the elements of design, operation, and maintenance; also, the standardization relating to principal dimensions to facilitate interchangeability, test methods, and test procedures of powered and nonpowered industrial trucks (not including vehicles intended primarily for earth moving or over-the-road hauling); and to maintain liaison with the International Organization for Standardization (ISO) in all matters pertaining to powered and nonpowered industrial trucks.

One purpose of the Standard is to serve as a guide to governmental authorities having jurisdiction over subjects within the scope of the Standard. It is expected, however, that the Standard will find a major application in industry, serving as a guide to manufacturers, purchasers, and users of the equipment.

For convenience, Standards for Powered and Nonpowered Industrial Trucks have been divided into separate volumes:

Safety Standards

- B56.1 Low Lift and High Lift Trucks
- B56.5 Guided Industrial Vehicles
- B56.6 Rough Terrain Forklift Trucks
- B56.7 Industrial Crane Trucks
- B56.8 Personnel and Burden Carriers
- B56.9 Operator Controlled Industrial Tow Tractors
- B56.10 Manually Propelled High Lift Industrial Trucks¹

¹B56.10 and B56.11.6 are in the developmental stage.

Standardization Standards

- B56.11.1 Double Race or Bi-Level Swivel and Rigid Industrial Casters
- B56.11.3 Load Handling Symbols for Powered Industrial Trucks
- B56.11.4 Hook-Type Forks and Fork Carriers for Powered Industrial Forklift Trucks
- B56.11.5 Measurement of Sound Emitted by Low Lift, High Lift, and Rough Terrain Powered Industrial Trucks
- B56.11.6 Evaluation of Visibility From Powered Industrial Trucks¹

Safety standards that were previously listed as B56 volumes but now have different identification due to a recent change in standards development assignments are as follows.

- NFPA 505 Fire Safety Standard for Powered Industrial Trucks — Type Designations, Areas of Use, Maintenance and Operation (formerly B56.2)
- UL 583 Standard for Safety for Electric-Battery-Powered Industrial Trucks (formerly B56.3)
- UL 558 Standard for Safety for Internal Combustion-Engine-Powered Industrial Trucks (formerly B56.4)

If adopted for government use, the references to other national standards in the specific volumes may be changed to refer to the corresponding governmental regulations.

The use of powered and nonpowered industrial trucks is subject to certain hazards that cannot be completely eliminated by mechanical means, but the risks can be minimized by the exercise of intelligence, care, and common sense. It is therefore essential to have competent and careful operators, physically and mentally fit, thoroughly trained in the safe operation of the equipment and the handling of the loads. Serious hazards are overloading, instability of the load, obstruction to the free passage of the load, poor maintenance, and using equipment for a purpose for which it was not intended or designed.

Suggestions for improvement of these standards, especially those based on actual experience in their application, shall be submitted to the Secretary of the B56 Committee, ASME, United Engineering Center, 345 East 47th Street, New York, NY 10017.

Comments shall be written in accordance with the following format:

(a) specify paragraph designation of the pertinent standard;

(b) indicate suggested change (addition, deletion, revision, etc.);

(c) briefly state reason and/or evidence for suggested change;

(d) submit suggested changes to more than one paragraph in the order in which they appear in the standard.

The appropriate B56 Subcommittee will consider each suggested revision at its first meeting after receipt of the suggested revision(s).

DOUBLE RACE OR BI-LEVEL SWIVEL AND RIGID INDUSTRIAL CASTERS

1 SCOPE

This standard establishes dimensional standards for double race or bi-level swivel and rigid industrial casters in order to provide for the overall interchangeability of a complete caster.

2 EXPLANATION

Most industrial casters are purchased as a complete unit, which includes the caster assembly and the wheel. For this reason, the specifications and dimensional tolerances in this Standard provide for the overall interchangeability of a complete caster.

This Standard does not include detailed specifications for the wheel utilized within the Standard, and does not include data on load rating for specific sizes of industrial casters.

Factors affecting interchangeability of a caster include overall height, overall size of mounting plate, hole spacings for the mounting plate, mounting bolt diameter, and swivel radius. Dimensions for each of these items are included in this Standard along with applicable tolerances.

For the purpose of identification, a nominal specification is given for the wheel diameter and tread width. Wheel diameter and tread width do not affect interchangeability of the entire caster, and tolerances are therefore not necessary.

3 INTERPRETATION

To carry out the provisions of this Standard, all items are mandatory except for those including the word *should*, which are recommendations.

For terminology not included in this publication, refer to ANSI Z94.0.

The B56 Committee will render an interpretation of any requirement of this Standard. Interpretations will be rendered only in response to a written request sent to the Secretary of the B56 Committee, ASME, 345 East 47th

Street, New York, NY 10017. The request for interpretation shall be in the following format.

Subject: Cite the applicable paragraph number(s) and provide a concise description.

Edition: Cite the applicable edition of the pertinent standard for which the interpretation is being requested.

Question: Phrase the question as a request for an interpretation of a specific requirement suitable for general understanding and use, not as a request for approval of a proprietary design or situation. The inquirer may also include any plans or drawings which are necessary to explain the question; however, they should not contain proprietary names or information.

ASME procedures provide for reconsideration of any interpretation when or if additional information which might affect an interpretation is available. Further, persons aggrieved by an interpretation may appeal to the cognizant ASME Committee or Subcommittee. ASME does not "approve," "certify," "rate," or "endorse" any item, construction, proprietary device, or activity.

The values stated in U.S. customary units are to be regarded as the standard.

4 DUTY CLASSIFICATIONS

Casters of various sizes are arranged into broadly defined duty classifications as a preliminary guide to selecting the caster size determined by experience as suitable for various applications. Caster manufacturers design casters for the duty classifications described in the following paragraphs and their literature and customer service departments should be consulted for details of load capacity for particular applications under consideration. Dimensional requirements for these classifications are given in Table 1.

TABLE 1 DIMENSIONS FOR INDUSTRIAL CASTERS

Wheel Diameter, in.	Tread Width, in.	Overall Height, in.	Overall Size of Mounting Plate, in.	Mounting Plate Hole Spacing, in.	Mounting Bolt Diameter, in.	Swivel Radius, in.
Light Duty Casters (para. 4.1)						
2	3/4	2 ⁵ / ₈	1 ¹ / ₄ × 2 ¹ / ₈	1 ³ / ₁₆ × 1 ⁹ / ₁₆	3/16	2
3	3/4	3 ¹ / ₁₆	2 ³ / ₄ × 3 ³ / ₄	1 ³ / ₄ × 3	1/4	2 ³ / ₄
4	1	4 ³ / ₄	2 ³ / ₄ × 3 ³ / ₄	1 ³ / ₄ × 3	1/4	3 ³ / ₄
5	1	5 ³ / ₄	2 ³ / ₄ × 3 ³ / ₄	1 ³ / ₄ × 3	1/4	4
Light Medium Duty (para. 4.2)						
3	1 ¹ / ₄	4 ³ / ₁₆	{ 2 ³ / ₄ × 3 ³ / ₄ or 3 ¹ / ₈ × 4 ¹ / ₈ }	{ 1 ³ / ₄ × 2 ⁷ / ₈ or 2 ³ / ₈ × 3 ⁷ / ₁₆ }	5/16	3
3 ¹ / ₂	1 ¹ / ₄	4 ³ / ₄			5/16	3 ¹ / ₄
4	1 ¹ / ₄	5 ¹ / ₁₆			5/16	3 ³ / ₄
5	1 ¹ / ₄	6 ¹ / ₈			5/16	4 ¹ / ₄
Medium Duty (Slotted Holes) (para. 4.3)						
4	1 ¹ / ₂	5 ⁵ / ₈	4 × 4 ³ / ₄	{ Slotted holes 2 ⁵ / ₈ × 3 ⁵ / ₈ to 3 × 3 }	3/8	4
5	1 ¹ / ₂	6 ¹ / ₁₆	4 × 4 ³ / ₄		3/8	4 ³ / ₄
6	1 ¹ / ₂	7 ³ / ₈	4 × 4 ³ / ₄		7/8	5 ¹ / ₂
Heavy Medium Duty (para. 4.4)						
4	2	5 ⁵ / ₈	{ 4 × 4 ¹ / ₂ or 5 × 5 ¹ / ₂ }	{ 4 ¹ / ₈ × 4 ¹ / ₂ or Slotted holes 2 ⁵ / ₈ × 3 ⁵ / ₈ to 3 × 3 }	3/8	4
5	2	6 ¹ / ₂			3/8	4 ¹ / ₂
6	2	7 ³ / ₈			3/8	5 ⁵ / ₈
8	2	9 ¹ / ₂			3/8	7 ¹ / ₄
Heavy Duty (Slotted Holes) (para. 4.5)						
6	2 ¹ / ₂	8 ¹ / ₈	5 × 7	{ Slotted holes 2 ⁷ / ₁₆ × 4 ¹⁵ / ₁₆ to 3 ³ / ₈ × 5 ¹ / ₄ }	1/2	5 ¹ / ₂
8	2 ¹ / ₂	10 ⁵ / ₈	5 × 7		1/2	7 ¹ / ₄
10	2 ¹ / ₂	12 ¹ / ₄	5 × 7		1/2	8 ¹ / ₂
12	3	14 ¹ / ₂	5 × 7		1/2	10 ¹ / ₄
Extra Heavy Duty (para. 4.6)						
8	3	11 ¹ / ₈	5 ¹ / ₂ × 7 ¹ / ₂	4 ¹ / ₈ × 6 ¹ / ₈	5/8	7 ¹ / ₄
10	3	13 ¹ / ₈	5 ¹ / ₂ × 7 ¹ / ₂	4 ¹ / ₈ × 6 ¹ / ₈	5/8	8 ¹ / ₂
12	3	15	9 × 11	7 × 9 ³ / ₄	5/8	9 ¹ / ₂
12	3 ¹ / ₂	15	9 × 11	7 × 9 ³ / ₄	5/8	9 ¹ / ₂

4.1 Light Duty — Up to 145 lb Load Capacity

Light duty casters are used for service carts, clothes baskets, tool stands, and similar light equipment in offices, homes, institutions, stores, schools, etc., where floors are smooth. Operation is manual and loads are light.

4.2 Light Medium Duty — Up to 300 lb Load Capacity

Light medium duty casters are used for applications similar to light duty, but where loads are somewhat heavier. Operation is manual and floors are smooth.

4.3 Medium Duty — Up to 575 lb Load Capacity

Medium duty casters are used for applications such as linen carts, heavier food service equipment, light warehouse trucks, and order picking trucks. Operation is manual and frequent. Floors are smooth.

4.4 Heavy Medium Duty — Up to 1000 lb Load Capacity

Heavy medium duty casters are used for commercial, industrial, and institutional applications such as platform trucks, warehouse stock trucks, and portable

shelving over smooth floors. They are operated manually or by intermittent power under 3 mph.

4.5 Heavy Duty — Up to 2000 lb Load Capacity


Heavy duty casters are used for commercial and factory applications. They are operated manually or by intermittent power under 3 mph; they are used on relatively smooth surfaces such as concrete which may have minor obstacles.

4.6 Extra Heavy Duty — Up to 2500 lb Load Capacity

Extra heavy duty casters are used for commercial and factory applications. They are operated by intermittent power under 3 mph; they are used on well-maintained surfaces which may have minor obstacles.

4.7 Super Duty

Super duty casters are used for loads and operating conditions exceeding those listed above. For dimensional requirements, consult the manufacturer.

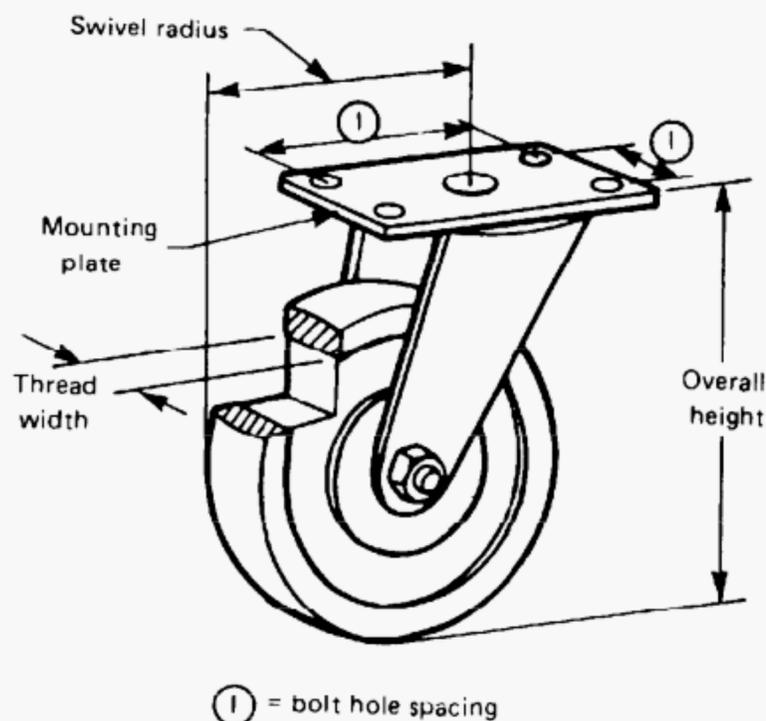

① = bolt hole spacing

FIG. 1 CASTER TERMS

5 DIMENSIONS AND TOLERANCES¹

5.1 Wheel Diameter

Wheel diameter is shown in Table 1 as nominal and for reference purposes only. Wheel diameter does not affect interchangeability of the complete caster.

5.2 Tread Width

Tread width is shown in Table 1 as nominal and for reference purposes only. Tread width does not affect interchangeability of the complete caster.

5.3 Overall Height

Overall height is the vertical distance between the top of the caster mounting plate and the bottom of the wheel (see Fig. 1).

Tolerances for overall height are affected by the general size of the wheel diameter. The larger the wheel size, the larger the overall height. Tolerances are therefore applied as follows:

Wheel Diameter, in.	Tolerance, in.
2 to 5	± 1/16
6 to 8	± 1/8
10 to 12	± 1/4

5.4 Mounting Plate — Overall Size

The mounting plate or top plate is used to attach the caster to the equipment. A tolerance of ± 1/4 in. is allowed to meet normal manufacturing and mill tolerances. The minimum size of the mounting plate is governed by the hole spacing, and no tolerance is required.

5.5 Hole Spacings for Mounting Plate

Tolerances for hole spacing are applied in accordance with the duty classification of the caster as follows (refer to Section 4):

Duty Classification	Tolerance, in.
Light and light medium	± 1/64
Medium and heavy medium	± 1/32
Heavy and extra heavy	± 1/16
Super	Consult manufacturer

¹See Fig. 1.

5.6 Mounting Bolt Diameter

Normal commercial tolerances are allowed on the diameter of the bolt used for attaching the mounting plate to the equipment.

5.7 Swivel Radius

Specifications are shown in Table 1 as maximum allowable swivel.

APPENDIX A
METRIC (SI) UNITS CONVERSION TABLE

(This Appendix is an integral part of ASME B56.11.1-1992 and is placed after the main text for convenience.)

$$1 \text{ in.} = 25.4 \text{ mm}$$

$$1 \text{ lbm} = 0.45 \text{ kg}$$


$$1 \text{ lbf} = 4.448 \text{ N}$$

$$1 \text{ mph} = 1.609 \text{ km/h}$$

AMERICAN NATIONAL STANDARDS ON MATERIAL HANDLING EQUIPMENT

Safety Code for Elevators and Escalators A17.1-1990
 Safety Standard for Conveyors and Related Equipment B20.1-1990
 Safety Standard for Low Lift and High Lift Trucks B56.1-1988
 Safety Standard for Guided Industrial Vehicles B56.5-1988
 Safety Standard for Rough Terrain Forklift Trucks B56.6-1987
 Safety Standard for Industrial Crane Trucks B56.7-1987
 Safety Standard for Personnel and Burden Carriers B56.8-1988
 Safety Standard for Operator Controlled Industrial Tow Tractors B56.9-1991
 Double Race or Bi-Level Swivel and Rigid
 Industrial Casters B56.11.1-1991
 Load Handling Symbols for Powered Industrial Trucks B56.11.3-1988
 Hook-Type Forks and Fork Carriers for Powered Industrial
 Forklift Trucks B56.11.4-1988
 Measurement of Sound Emitted by Low Lift, High Lift, and
 Rough Terrain Powered Industrial Trucks B56.11.5-1989
 Definitions and Terminology Covering Pallets and Related
 Structures MH1.1.2-1989
 Pallet Sizes MH1.2.2M-1989
 Specifications for Identification and Marking of
 Cargo Containers MH5.3M-1982

The ASME Publications Catalog shows a complete list of all the Standards published by the Society. For a complementary catalog, or the latest information about our publications, call 1-800-THE-ASME (1-800-843-2763.)

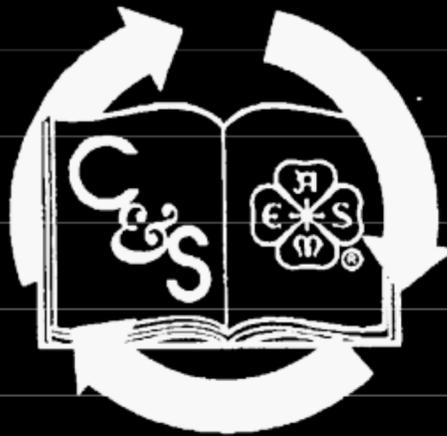

This document is printed
on 50% recycled paper.

50% RECOVERED PAPER MATERIAL
means paper waste generated after the
completion of the papermaking
process, such as postconsumer
materials, text books, envelopes,
bindery waste, printing waste, cutting
and converting waste, butt rolls,
obsolete inventories, and rejected
unused stock.

ISBN #0-7918-2148-x



K05192